

S-SCROLL POST TOP ARM

DESCRIPTION

This versatile arm is suited for traditional and contemporary fixtures. The SS-PT arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

FEATURES

Decorative cast aluminum and extruded aluminum pole or wall bracket mounting.


Mounts to 2 $\frac{3}{8}$ " or 2 $\frac{7}{8}$ " O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.

6061 alloy T-6 temper with cast aluminum slip fitter.

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

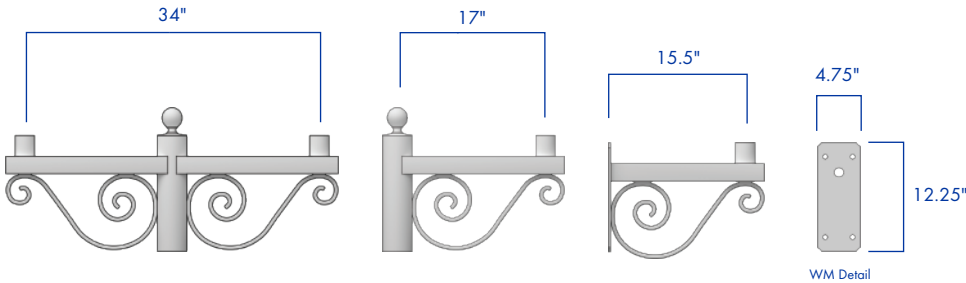

SUITABLE FOR
WET
LOCATIONS

ORDERING INFORMATION

AVPL - _____ - _____ - _____

ARM	MOUNTING	FINISH
SS-PT	1-90..... ○	DARK BRONZE
	2-90..... ○○	BLACK
	2-180..... ○○	WHITE
	3-90..... ○○○	GREY
	4-90..... ○○○○	GREEN
	WALL MOUNT..... ○	

CONTACT
FACTORY FOR
DRILLING OPTIONS

ALL RAL COLORS
AVAILABLE